




# V4 Wood Flooring®

## A110 Glade Oak

### Technical Data Sheet

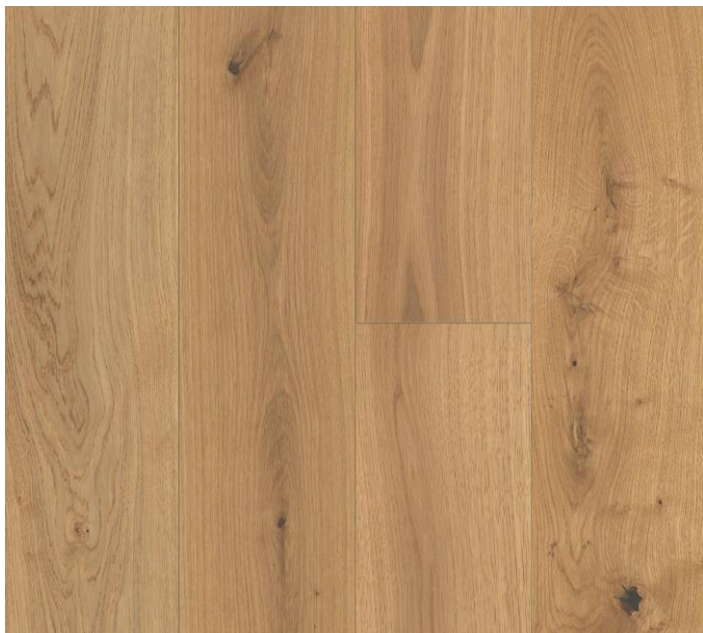

#### Product Details:

|               |  |
|---------------|--|
| Product Code  | A110                                   |
| Collection    | Alpine                                 |
| Construction  | Engineered                             |
| Species       | Oak                                    |
| Product Type  | Engineered Plank                       |
| Surface       | Sanded                                 |
| Finish        | Matt UV Lacquer                        |
| Dimensions    | 190 x 14/3 x 1900 mm                   |
| Top Layer     | 3 mm – Solid European Oak              |
| Core Layer    | 11 mm – 2 Layer Softwood               |
| Grade         | CD Rustic                              |
| Pack Size     | 2.166 m <sup>2</sup>                   |
| Pack Contents | 6 Boards – May Include 2 split lengths |
| Joint Type    | Tongue & Grooved                       |
| Edge Profile  | Bevel Edged on 4 sides                 |

#### Technical Information:

|  |  |
|--|--|
| Origin                                   | Europe   |
| UKTR / UK Timber Regulation              | Full documented evidence of legality of timber |
| FSC® Certification                       | Certification Available for Project Enquires   |
| PEFC® Certification                      | Not available with this product                |
| Janka Hardness                           | Oak 1360 lbf (6000N)                           |
| Slip Resistance                          | EN 14231 (Test Result 80/46 PTV)               |
| European Reaction to Fire Classification | EN 13501-1 (test result Dfl-s1)                |
| Release of Formaldehyde                  | EN 717-1 (Test result E1)                      |
| Thermal Conductivity                     | EN 12524 (Test result: 0.16W/mK)               |
| Tog Rating                               | 1.13   |

#### Grading: Rustic

A110 is a rustic grade floor, meaning it will contain varying amounts of live and dead filled knots. In addition, the floor will contain Heartwood and Sapwood, offering a wider range of colour variation, and Expert Checks can be expected (cracks along the growth ring). The colour of the filler used on this floor is intended to complement the natural structure of the wood, and such may contrast the surrounding timber, as can be seen in knots. This may vary from batch to batch.

#### Maintenance: Lacquered Floor Care



Sweep with a soft bristle brush, or the parquet attachment on your vacuum cleaner. Always ensure you are using PH Neutral cleaners and avoid soaking the floor with water. Avoid scratches by minimising grit and dust, install doorway entrance mats and felt pads to protect furniture. Scan the QR code to visit our Lacquered Floor Care page on our website, for more details.

#### Installation Methods:

|                         |  |
|-------------------------|--|
| Fully Bonded            | Yes*   |
| Secret Nailed           | No   |
| Floated on Underlay     | Yes*   |
| Over Underfloor Heating | Yes* (fully bonded installation recommended) |
| V4 Magnetic             | Yes*   |

All V4 floors must be installed by an experienced and fully competent flooring installer who have the necessary skills to complete each installation in line with the BS8201:2011 standard. The responsibility of inspection of goods lies with the installer, and it is their duty to notify V4 of any potential concerns prior to installation. Installation of your V4 floor is considered acceptance of goods.  
\*Subject to correctly prepared and compatible subfloor and in conjunction with correct installation.

#### Further Information:



Scan this QR code to visit the A110, Glade Oak product page on our website, where you can find more information on the installation and maintenance, make an enquiry and order your free sample.



#### Post-Installation:

**DO NOT COVER THIS PRODUCT WITH A NON BREATHABLE COVERING FOR LONGER THAN 1 WEEK.** Prolonged covering may create a microclimate which can damage the protective top layer. Underfloor heating will greatly magnify the affect.

## V4 Wood Flooring®

Call +44(0)1276 488099  
Email team@v4woodflooring.co.uk  
Visit www.v4woodflooring.co.uk

© This technical data sheet was written by V4 Wood Flooring Ltd. Greenbays Park Carhouse Lane, Horsell, Surrey GU21 4YP. At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. It is the duty of the customer to confirm the specification of their chosen floor upon purchasing. Wood flooring is a natural product with variation in colour, the colour representation in this picture is for illustrative purposes only and no rights can be derived from them. Please use product images as a guide in conjunction with the website and product samples.